

Industrial LAN Cable Connector assy type	Indusrrial Path Cord (STP) Recommend Assy.	Jun. 2024
	Patch Cord (Both side RJ45 Plug)	NO-1



Okano Cable made Removable type STP LAN Cable

Style number	FCCL-2A331-(M=length)
---------------------	------------------------------

Strong Point :

Frame retardant:VW-1 Heat resistant

Oil resistant : Flexibility

UL758 (8 0 °C · 60 V)

shield style (SA+SB) double (AL Tape+Alloy wire strand type)

Conductor(AWG30:Stranding type) CAT5e(1000BASE-T)

Tensil Strength:500N

Bendig Propertise

9 0 °Left/Right Vibration Resistance Test(15million Over)

Cable Carrier Resistance Test 4000 ten thousand times over

Twist Resistance Test : U style:1000 tenthousand times ove

Purpose :For inside wiring Robot.for inside wiring Bord wiring for Industrial. Surveillance camera.



PoE(No correspond)

correspond of RoHS

O.Diameter:4.0mm

Max. length:20m

Both side RJ45 plug

Industrial LAN Cable Connector assy type	Indusrrial Path Cord (STP) Recommend Assy.	Jun. 2024
	Patch Cord (Both side RJ45 Plug)	NO-1



OKANO Cable made Water proof · Oil resistant STP LAN Cables

Style NO.	FCCL-21341-(M=Order length)
-----------	-----------------------------

Strong Point

- Water Proof
- Oil Resisutance
- Use of Inside & Outside
- Double Shield (SA SB) (AL+Alloy wire stranding)
- AWG24:0.5mm/Single wire
- Environmental(medicines . Environment)
- Polyurethane(Black color)
- Papose:Inside and outside of factory
- Please contact our sales staff . About LAN construction

- Abrasion Resistance
- Fix Wiring
- Band of Tem.(-30℃~70℃)
- CAT5e(1000BASE-T)



- Correspondece of RoHS
- Cable diameter :6.7mm
- Use of Max.cable length:100m
- Standard Style : Both side RJ45Plug
- (Attachable of water proof type)


Net work Cable Optical Fiber Cables	CC-Link IE Control Recommended Product Items	2024. June
	Okano Cable made (Both side Optical Fiber) Path Cord	NO-3

2C Flat Optical Cord made by OKANO

CC-Link IE control recommend

Style number	OP-2444-1-(M=reserve)
--------------	-----------------------

Outer Jacket Nonharogen Flamereturdant Polyethylene
 Structure Glasses Type :1.7mmx3.4mm
 For Inside 2 cores · GI · OM2 · 50/125 · 5G
 Recommend RoHS · C-Link IE control
 Cord color wakakusa : LG-wakakusa:LC

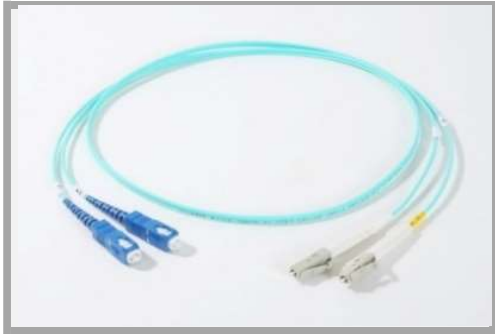

Target : DLC connector type

2c optical cable capacity to resist pressure type.made by OKANO

CC-Link IE control recommend

Style number	OPF-B444-(M=reserve)
--------------	----------------------

Water proof. Pre Oil Abrasion Resistance
 Pre. OIL Flame retardant (JIS 3005)
 Use of inside & outside Temperture range -30~70℃
 Diameter 6.2mm
 Inside&outside 2芯 · GI · OM2 · 50/125 · 5G
 Cord color wakakusa:LG-: murasaki : Prple



Target : DLC connector type

Optical Fiber · Please Contact Our Staff ,About Fusion Construction